

Подавление поперечных колебаний упругой балки с использованием динамических поглотителей

А. Э. Кудратов¹, Р. С. Худазаров²✉, О. О. Юлдошева³

¹Самаркандский государственный педагогический институт, Самарканд, Республика Узбекистан

²Совместный Белорусско-Узбекский межотраслевой институт прикладных технических квалификаций в городе Ташкенте, Республика Узбекистан

³Ташкентский химико-технологический институт, Республика Узбекистан

E-mail: a_qudratov1985@mail.ru, ✉nurali_e@mail.ru, parizodaxondamir@gmail.com

Поступила в редакцию 10.01.2026, принята к публикации 23.03.2026,

опубликована онлайн 24.03.2026

Аннотация. В статье рассматривается задача оптимизации параметров упругой балки с динамическими гасителями колебаний при поперечных вибрациях. Аналитически получены методы демпфирования поперечных колебаний исследуемой упругой балки. В частности, проанализировано изменение оптимальных параметров рассматриваемой системы в зависимости от массового отношения и изменения мест установки динамических гасителей колебаний.

Также в статье исследуется оптимизация параметров системы упругих балок при установившихся колебаниях с двумя динамическими гасителями колебаний. Рассмотрено решение задачи поперечных колебаний балки с двумя параллельно установленными динамическими гасителями колебаний с использованием метода разложения по формам собственных колебаний. Данный метод является удобным и эффективным для оптимизации параметров динамических гасителей колебаний при различных типах колебаний балки и граничных условиях, особенно в случаях, когда требуется многократный расчет амплитудно-частотных характеристик системы.

Ключевые слова: Упругая балка, оператор Лапласа, изгибающий момент, динамический гаситель колебаний, поперечные колебания, амплитудно-частотная характеристика.

Благодарности. Работа выполнена при поддержке...

Для цитирования: Кудратов А. Э., Худазаров Р. С., Юлдошева О. О. Подавление поперечных колебаний упругой балки с использованием динамических поглотителей // Известия вузов. ПНД. 2026. DOI: 10.18500/0869-6632-003216. EDN: WCVTIS

Статья опубликована на условиях Creative Commons Attribution License (CC-BY 4.0).

Eliminating transverse vibrations on an elastic beam using absorbers

A. E. Kudratov¹, R. S. Khodazarov²✉, O. O. Yuldosheva³

¹Samarkand State Pedagogical Institute, Samarkand, Uzbekistan

²Joint Belarusian-Uzbek Intersectoral Institute of Applied Technical Qualifications, Tashkent, Uzbekistan

³Tashkent Institute of Chemical Technology, Republic of Uzbekistan

E-mail: a_qudratov1985@mail.ru, ✉nurali_e@mail.ru, parizodaxondamir@gmail.com

Received 10.01.2026, accepted 23.03.2026, available online 24.03.2026

Abstract. This article examines the optimization of the parameters of an elastic beam with dynamic vibration absorbers under transverse vibrations. Analytical methods for damping transverse vibrations in the considered elastic beam are obtained. In particular, changes in the optimal parameters of the system are analyzed depending on the mass ratio and the installation locations of the dynamic vibration absorbers.

The article discusses the optimization of the parameters of an elastic beam system under steady-state vibrations with two dynamic vibration absorbers. The problem of transverse vibrations of a beam with two parallel-installed dynamic vibration absorbers is investigated using the method of series expansion in vibration modes. This method is more convenient for optimizing the parameters of dynamic vibration absorbers for various types of beam vibrations with different boundary conditions, especially when repeated calculations of the amplitude–frequency characteristics of the system are required.

Keywords: Elastic beam, Laplace operator, bending moment, dynamic vibration absorber, transverse vibrations, amplitude–frequency response.

Acknowledgements. This work was supported by...

For citation: Kudratov AE, Khudazarov RS, Yuldosheva OO Eliminating transverse vibrations on an elastic beam using absorbers. *Izvestiya VUZ. Applied Nonlinear Dynamics*. 2026. DOI: 10.18500/0869-6632-003216

This is an open access article distributed under the terms of Creative Commons Attribution License (CC-BY 4.0).

Introduction

Modern development of engineering and technology requires the design of elastic beams with economical and low material consumption. In this context, problems associated with transverse vibrations of elastic beams often arise. Insufficient investigation of methods for solving transverse vibration problems leads to the necessity of introducing additional design modifications during the stages of design, construction, and commissioning. This, in turn, results in increased development time or changes in the main performance characteristics of the product, thereby reducing the consumer properties of elastic beams [1–5].

Numerous scientific studies are devoted to the problem of vibration suppression in systems with distributed parameters using dynamic vibration absorbers. It has been shown in [6, 7] that when a dynamic vibration absorber is attached to a beam, an additional natural frequency of the system appears. This frequency is close to the partial natural frequency of the absorber and, depending on the system parameters, may be lower than, higher than, or equal to the absorber’s partial frequency.

Experimental investigations [8] present a comparative analysis of beam vibrations with two dynamic vibration absorbers symmetrically positioned relative to the beam ends. In this case, the governing differential equations of motion are nonlinear and require the application of appropriate analytical and numerical solution methods.

In works [9], nonlinear vibration problems of a beam with a dynamic vibration absorber are

analyzed, taking into account elastic–damping properties of the hysteresis type under harmonic excitation. Solutions of the governing equations are obtained in the form of transfer functions.

The dynamics of nonlinear oscillatory systems [10], as well as their stability [11], have been extensively studied. Based on the above, it follows that the investigation of beam vibrations and vibration suppression remains a relevant problem in modern mechanics. This article focuses on the optimization of system parameters during steady-state vibrations of a beam equipped with two dynamic vibration absorbers.

A vibration control device is presented in [12], consisting of compression and tension springs operating jointly to resist vertical and horizontal loads caused by permanent, temporary, and seismic actions. In addition to absorbing vertical and horizontal loads, the device is capable of restoring the span structure to its initial position after seismic excitation. Furthermore, it eliminates resonance effects without increasing construction costs for the span, supports, or foundations and does not complicate installation conditions.

1. Proposed Methodology, Experiments and Results

In the present study, the objective is to suppress transverse vibrations of an elastic beam using dynamic vibration absorbers (DVAs). An algorithm describing the sequence of operations required to achieve the desired dynamic properties is developed based on a systematic set of procedures. Fig. 1 illustrates the algorithm of operations and the main stages of the proposed technical process.

The solution to the problem of transverse vibrations of a beam with two parallel-installed dynamic vibration absorbers is considered using the method of series expansion in vibration modes. This approach is particularly convenient for optimizing the parameters of dynamic vibration absorbers for various types of beam vibrations under different boundary conditions, especially when repeated calculations of the amplitude–frequency characteristics (AFC) of the system are required.

The results of the studies cited above confirm that, for sufficiently large vibration decrement of the material of the elastic–damping element of the dynamic vibration absorber (DVA), the nonlinearity of the internal resistance characteristics of the beam material has a negligible effect on the beam vibrations and on the determination of the optimal parameters of the DVA.

Consider a beam of length l , width b , and height h , rigidly fixed to a vibrating base. The motion of the base is prescribed along the Oz axis. Dynamic vibration absorbers are installed at points of the beam with coordinates x_1 and x_2 [13–15] (Fig. 2).

2. Analysis of Experiments and Research Results

We write the governing differential equations of motion of an elastic beam with two dynamic vibration absorbers (DVAs) under kinematic excitation in the following form:

$$\begin{aligned} \frac{\partial^2 M}{\partial x^2} + \rho F \frac{\partial^2 w}{\partial t^2} - c_1 R_1 \delta(x - x_1) \zeta_1 - c_2 R_2 \delta(x - x_2) \zeta_2 &= -\rho F \frac{\partial^2 w_0}{\partial t^2}, \\ m_1 \frac{\partial^2 w(x_1, t)}{\partial t^2} + m_1 \frac{\partial^2 \zeta_1}{\partial t^2} + c_1 R_1 \zeta_1 &= -m_1 \frac{\partial^2 w_0}{\partial t^2}, \\ m_2 \frac{\partial^2 w(x_2, t)}{\partial t^2} + m_2 \frac{\partial^2 \zeta_2}{\partial t^2} + c_2 R_2 \zeta_2 &= -m_2 \frac{\partial^2 w_0}{\partial t^2}. \end{aligned} \quad (1)$$

Here, M denotes the bending moment; the terms involving the Dirac delta functions

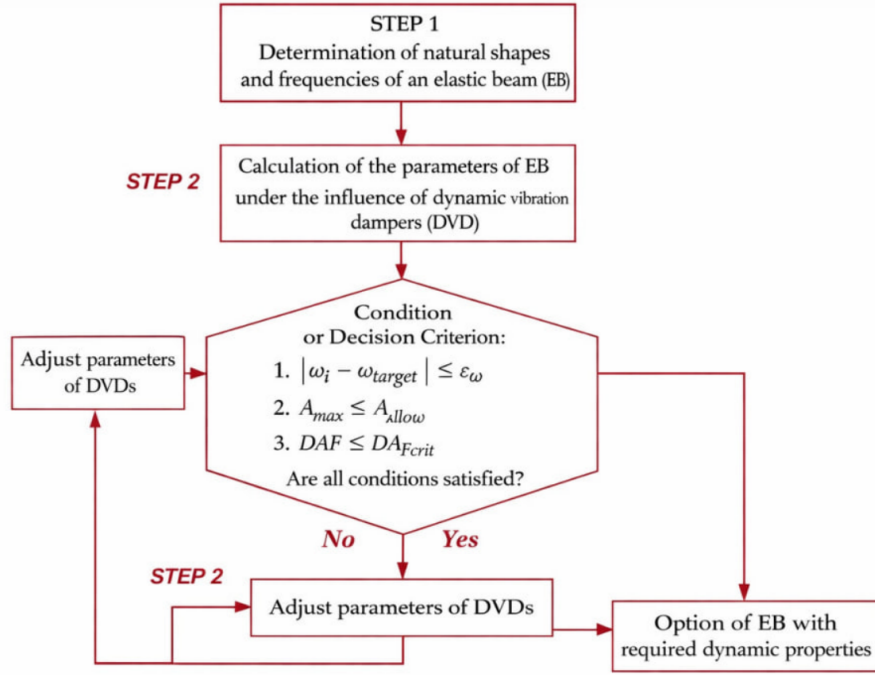


Рис. 1. Алгоритм операций и этапов технического процесса.

Fig. 1. Algorithm of operations and stages of the technical process.

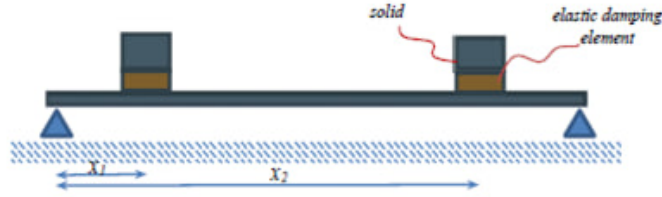


Рис. 2. Расчетная схема упругой балки (УБ) с двумя динамическими гасителями колебаний.

Fig. 2. Design diagram of an elastic beam (EB) with two dynamic vibration absorbers (DVAs).

represent the interaction forces between the beam and the dynamic vibration absorbers. In particular, the absorber force acts as a concentrated transverse force applied at the installation points $x = x_1$ and $x = x_2$. ρ is the material density; F is the cross-sectional area of the beam; $w(x, t)$ is the transverse deflection of the beam; $w_0(t)$ is the prescribed displacement of the vibrating base; $w(x_1, t)$ and $w(x_2, t)$ are the beam displacements at the DVA installation points; c_1 and c_2 are the stiffness coefficients of the elastic-damping elements of the DVAs; m_1 and m_2 are the absorber masses; ζ_1 and ζ_2 denote the relative displacements of the DVAs with respect to the beam; $\delta(x - x_1)$ and $\delta(x - x_2)$ are the Dirac delta functions indicating the locations of the dynamic vibration absorbers; x_1 and x_2 are the coordinates of the DVA installation points.

$$R_1 = 1 + (-\nu_1 + j\nu_2) [D_0 + g_1(\zeta_{1rel})]. \quad (2)$$

$$R_2 = 1 + (-\theta_1 + j\theta_2) [E_0 + g_2(\zeta_{2rel})]. \quad (3)$$

Here, $j^2 = -1$, $\nu_1, \nu_2, \theta_1, \theta_2$ are coefficients determined by the dissipative properties of the materials, and $g_1(\zeta_{1rel})$, $g_2(\zeta_{2rel})$ denote the vibration decrements [19].

$$g_1(\zeta_{1rel}) = \sum_{K_1=1}^{r_1} D_{K_1} \zeta_{1rel}^{K_1}. \quad (4)$$

$$g_2(\zeta_{2rel}) = \sum_{K_2=1}^{r_2} E_{K_2} \zeta_{2rel}^{K_2}. \quad (5)$$

The parameters $D_0, D_1, \dots, D_{r_1}, E_0, E_1, \dots, E_{r_2}$ are material-dependent parameters of the elastic elements of dynamic absorbers and are determined experimentally [9]. The relationship between the normal stress σ_n and the relative strain ξ_{rel} is given as follows [10].

$$\sigma_n = E \left(1 + (-\eta_1 + j\eta_2) [C_0 + f(\xi_{rel})] \right) \xi_{rel}. \quad (6)$$

Here, E is the modulus of elasticity of the rod material; η_1, η_2 are coefficients determined by the dissipative properties of the materials; and $f(\xi_{rel})$ denotes the vibration decrement of the rod, which can be expressed as follows:

$$f(\xi_{rel}) = \sum_{j_1=1}^{r_3} C_{j_1} \xi_{rel}^{j_1}. \quad (7)$$

Here, C_0, C_1, \dots, C_{r_3} are experimentally determined coefficients of the hysteresis loop that characterize the nonlinear dissipative properties of the rod material. In this study, the coefficients C_0, C_1, C_2, C_3 are adopted from the model proposed by Pisarenko and Boginich [9].

For the relative strain, the following expression is written:

$$\xi_{rel} = \frac{\partial^2 w}{\partial x^2} z, \quad (8)$$

here, the z -axis is directed along the cross section of the rod.

We calculate the bending moment acting on the cross section of the rod:

$$M = 2b \int_0^{h/2} \sigma_n z dz = EJ \frac{\partial^2 w}{\partial x^2} \left[1 + C_0(-\eta_1 + j\eta_2) + \frac{24}{h^3}(-\eta_1 + j\eta_2) \int_0^{h/2} f(\xi_{rel}) z^2 dz \right], \quad (9)$$

here, $J = \frac{bh^3}{12}$ is the second moment of area; b is the width of the rod, and h is the height (thickness) of the rod.

Substituting the obtained expression for the bending moment into the first equation of system (1), we obtain the following system of differential equations:

As a result, the system of differential equations takes the form

$$\begin{aligned} EJ[1 + C_0(-\eta_1 + j\eta_2)] \frac{\partial^4 w}{\partial x^4} + \frac{24}{h^3} EJ(-\eta_1 + j\eta_2) \frac{\partial^2}{\partial x^2} \left[\frac{\partial^2 w}{\partial x^2} \int_0^{h/2} f(\xi_{rel}) z^2 dz \right] + \rho F \frac{\partial^2 w}{\partial t^2} - \\ - c_1 R_1 \delta(x - x_1) \zeta_1 - c_2 R_2 \delta(x - x_2) \zeta_2 = -\rho F \frac{\partial^2 w_0}{\partial t^2}, \\ m_1 \frac{\partial^2 w(x_1, t)}{\partial t^2} + m_1 \frac{\partial^2 \zeta_1}{\partial t^2} + c_1 R_1 \zeta_1 = -m_1 \frac{\partial^2 w_0}{\partial t^2}, \\ m_2 \frac{\partial^2 w(x_2, t)}{\partial t^2} + m_2 \frac{\partial^2 \zeta_2}{\partial t^2} + c_2 R_2 \zeta_2 = -m_2 \frac{\partial^2 w_0}{\partial t^2}. \end{aligned} \quad (10)$$

To solve system (10), the displacement of the rod is represented in the following form:

$$w(x, t) = \sum_{i=1}^{\infty} u_i(x) q_i(t). \quad (11)$$

Here, $q_i(t)$ is a function of time, while $u_i(x)$ represents the mode shape (eigenfunction) of the rod and satisfies the following equation:

$$EJ \frac{d^4 u_i(x)}{dx^4} - \rho F p_i^2 u_i(x) = 0. \quad (12)$$

Here, p_i denotes the natural frequency of the rod.

Substituting solution (11) into system (10) and taking relation (12) into account, after the corresponding transformations we obtain

$$\begin{aligned} & \sum_{i=1}^{\infty} \left(\left(\ddot{q}_i + [1 + C_0(-\eta_1 + j\eta_2)] p_i^2 q_i \right) u_i + \right. \\ & \left. + \frac{3EJ}{\rho F} (-\eta_1 + j\eta_2) q_i \sum_{j_1=1}^{r_3} C_{j_1} q_{ia}^{j_1} \frac{j_1^{h_{j_1}}}{2^{j_1}(j_1+3)} \frac{\partial^2}{\partial x^2} \left(\frac{\partial^2 u_i}{\partial x^2} \int_0^{h/2} z^2 f(\xi_{rel}) dz \right) \right) - \\ & - \frac{c_1}{\rho F} \zeta_1 R_1 \delta(x - x_1) - \frac{c_2}{\rho F} \zeta_2 R_2 \delta(x - x_2) = -W_0, \quad (13) \\ & \sum_{i=1}^{\infty} u_{i1} \ddot{q}_i + \ddot{\zeta}_1 + n_1^2 R_1 \zeta_1 = -W_0, \\ & \sum_{i=1}^{\infty} u_{i2} \ddot{q}_i + \ddot{\zeta}_2 + n_2^2 R_2 \zeta_2 = -W_0, \end{aligned}$$

here,

$$W_0 = \frac{\partial^2 w_0}{\partial t^2}$$

is the base acceleration.

In the particular case, the dynamic absorbers are assumed to be linear, i.e., $\nu_1 = \nu_2 = \theta_1 = \theta_2 = 0$. Using the Bubnov–Galerkin method for the first equation of system (13) and employing the orthogonality condition of the functions $u_i(x)$, we obtain the following system of differential equations:

After performing the corresponding transformations, the system of equations is reduced to the following form:

$$\begin{aligned} & \ddot{q}_i + [1 + (-\eta_1 + j\eta_2) N_i] p_i^2 q_i - \mu_1 \mu_{0i} n_1^2 u_{i1} \zeta_1 - \mu_2 \mu_{0i} n_2^2 u_{i2} \zeta_2 = -d_i W_0. \\ & u_{i1} \ddot{q}_i + \ddot{\zeta}_1 + n_1^2 \zeta_1 = -W_0; \\ & u_{i2} \ddot{q}_i + \ddot{\zeta}_2 + n_2^2 \zeta_2 = -W_0, \end{aligned} \quad (14)$$

where p_i is the natural frequency of the beam; the dimensionless mass ratios are defined as

$$\begin{aligned} \mu_1 &= \frac{m_1}{m_s}, & \mu_2 &= \frac{m_2}{m_s}, \\ \mu_{0i} &= \frac{l}{d_{2i}}, & d_i &= \frac{d_{1i}}{d_{2i}}, \end{aligned}$$

with

$$d_{1i} = \int_0^l u_i(x) dx, \quad d_{2i} = \int_0^l u_i^2(x) dx,$$

where

$$m_s = \rho Fl,$$

$$N_i = C_0 + \frac{3EJ\mu_{0i}}{m_s p_i^2} \sum_{j_1=1}^{r_3} C_{j_1} q_{ia}^{j_1} \frac{h^{j_1}}{2^{j_1}(j_1+3)} G_{ij_1},$$

$$G_{ij_1} = \int_0^l u_i(x) \frac{\partial^2}{\partial x^2} \left(\frac{\partial^2 u_i}{\partial x^2} \left| \frac{\partial^2 u_i}{\partial x^2} \right|^{j_1} \right) dx,$$

is the mass of the beam; m_1 and m_2 are the masses of the dynamic vibration absorbers; $u_i(x)$ are the natural vibration modes of the beam; W_0 denotes the base acceleration. The modal shape functions at the installation points of the absorbers are given by

$$u_{i1} = u_i(x_1), \quad u_{i2} = u_i(x_2),$$

where x_1 and x_2 are the coordinates of the DVA installation points.

The natural frequencies of the dynamic vibration absorbers are defined as

$$n_1 = \sqrt{\frac{c_1}{m_1}}, \quad n_2 = \sqrt{\frac{c_2}{m_2}},$$

where c_1 and c_2 are the stiffness coefficients of the elastic elements of the absorbers.

The base displacement is denoted by $w_0(t)$, and the corresponding base acceleration is defined as

$$W_0 = \frac{\partial^2 w_0}{\partial t^2}.$$

In the case of harmonic excitation, the base acceleration is assumed in the form

$$W_0 = w_b \cos(\omega t),$$

where w_b is the amplitude of the base acceleration and ω is the excitation frequency.

We seek steady-state solutions of the system in the following form:

$$\begin{aligned} q_{mi}(t) &= a_{mi}(t) \cos(\omega t + \alpha_{mi}(t)), \\ \zeta_1(t) &= b_1(t) \cos(\omega t + \beta_1(t)), \\ \zeta_2(t) &= b_2(t) \cos(\omega t + \beta_2(t)). \end{aligned} \tag{15}$$

Substituting these expressions into the governing differential equations of motion and assuming that the coefficients vary slowly with time, we obtain the following system of averaged (normal) equations for the system under consideration:

$$\begin{aligned} \dot{\alpha}_{mi} &= \frac{1}{2\omega} \left[d_i w_b \sin \alpha_{mi} - a_{mi} p_i^2 \eta_2 N_i + l_{1,i} n_1^2 b_1 \sin \phi_1 + l_{2,i} n_2^2 b_2 \sin \phi_2 \right], \\ \dot{\alpha}_{mi} &= \frac{1}{2a_{mi}\omega} \left[d_i w_b \cos \alpha_{mi} + a_{mi} p_i^2 (1 - \eta_1 N_i) - a_{mi} \omega^2 - l_{1,i} n_1^2 b_1 \cos \phi_1 - l_{2,i} n_2^2 b_2 \cos \phi_2 \right], \\ \dot{b}_1 &= \frac{1}{2\omega} \left[(1 - d_i u_{i1}) w_b \sin \beta_1 - l_{2,i} n_2^2 u_{i1} b_2 \sin \phi_3 - u_{i1} p_i^2 a_{mi} \sin \phi_1 \right], \\ \dot{\beta}_1 &= \frac{1}{2b_1\omega} \left[(1 - d_i u_{i1}) w_b \cos \beta_1 + b_1 n_1^2 T_{i,6} - b_1 \omega^2 + l_{2,i} n_2^2 u_{i1} b_2 \cos \phi_3 - u_{i1} p_i^2 a_{mi} \cos \phi_1 \right], \\ \dot{b}_2 &= \frac{1}{2\omega} \left[(1 - d_i u_{i2}) w_b \sin \beta_2 - l_{1,i} n_1^2 u_{i2} b_1 \sin \phi_3 - u_{i2} p_i^2 a_{mi} \sin \phi_2 \right], \\ \dot{\beta}_2 &= \frac{1}{2b_2\omega} \left[(1 - d_i u_{i2}) w_b \cos \beta_2 + b_2 n_2^2 T_{i,7} - b_2 \omega^2 + l_{1,i} n_1^2 u_{i2} b_1 \cos \phi_3 - u_{i2} p_i^2 a_{mi} \cos \phi_2 \right]. \end{aligned} \tag{16}$$

where

$$\begin{aligned}\phi_1 &= \beta_1 - \alpha_{mi}, & \phi_2 &= \beta_2 - \alpha_{mi}, & \phi_3 &= \beta_2 - \beta_1, \\ l_{1,i} &= \mu_1 \mu_{0i} u_{i1}, & l_{2,i} &= \mu_2 \mu_{0i} u_{i2}.\end{aligned}$$

From the system of equations (16), putting zeros instead of the derivatives on the left-hand side, we obtain the stationary solutions in the following form:

$$\begin{aligned}|q_{mi}| &= |a_{mi}| = \sqrt{\frac{(B_1(\omega))^2 + (B_2(\omega))^2}{(B_3(\omega))^2 + (B_4(\omega))^2}} w_b, \\ |\zeta_1| &= |b_1| = \sqrt{\frac{(B_5(\omega))^2 + (B_6(\omega))^2}{(B_3(\omega))^2 + (B_4(\omega))^2}} w_b, \\ |\zeta_2| &= |b_2| = \sqrt{\frac{(B_7(\omega))^2 + (B_8(\omega))^2}{(B_3(\omega))^2 + (B_4(\omega))^2}} w_b.\end{aligned}\tag{17}$$

The coefficients A_k ($k = 1, \dots, 18$) are determined as follows:

$$\begin{aligned}B_1(\omega) &= d_i \omega^4 - A_1 \omega^2 + A_2, & B_2(\omega) &= -A_3 \omega^2 + A_4, \\ B_3(\omega) &= -\omega^6 + A_5 \omega^4 - A_6 \omega^2 + A_7, \\ B_4(\omega) &= A_8 \omega^4 - A_9 \omega^2 + A_{10}, \\ B_5(\omega) &= (1 - d_i u_{i1}) \omega^4 - A_{11} \omega^2 + A_{12}, \\ B_6(\omega) &= -A_{13} \omega^2 + A_{14}, \\ B_7(\omega) &= (1 - d_i u_{i2}) \omega^4 - A_{15} \omega^2 + A_{16}, \\ B_8(\omega) &= -A_{17} \omega^2 + A_{18}, \\ A_1 &= n_1^2 T_{i,1} + n_2^2 T_{i,2}, & A_2 &= n_1^2 n_2^2 T_{i,3}, & A_3 &= 0, & A_4 &= 0, \\ A_5 &= p_i^2 (1 - \eta_1 N_i) + n_1^2 T_{i,6} + n_2^2 T_{i,7}, \\ A_6 &= (n_1^2 + n_2^2) p_i^2 (1 - \eta_1 N_i) + n_1^2 n_2^2 T_{i,8}, \\ A_7 &= n_1^2 n_2^2 p_i^2 (1 - \eta_1 N_i), & A_8 &= p_i^2 \eta_2 N_i, \\ A_9 &= (n_1^2 + n_2^2) p_i^2 \eta_2 N_i, & A_{10} &= n_1^2 n_2^2 p_i^2 \eta_2 N_i, \\ A_{11} &= p_i^2 (1 - \eta_1 N_i) + T_{i,4} n_2^2, & A_{12} &= n_2^2 p_i^2 (1 - \eta_1 N_i), \\ A_{13} &= p_i^2 \eta_2 N_i, & A_{14} &= n_2^2 p_i^2 \eta_2 N_i, \\ A_{15} &= p_i^2 (1 - \eta_1 N_i) + n_1^2 T_{i,5}, & A_{16} &= n_1^2 p_i^2 (1 - \eta_1 N_i), \\ A_{17} &= p_i^2 \eta_2 N_i, & A_{18} &= n_1^2 p_i^2 \eta_2 N_i.\end{aligned}$$

The auxiliary coefficients $T_{i,j}$ are given by

$$\begin{aligned}T_{i,1} &= d_i + \mu_{0i} \mu_1 u_{i1}, & T_{i,2} &= d_i + \mu_{0i} \mu_2 u_{i2}, \\ T_{i,3} &= d_i + \mu_{0i} (\mu_1 u_{i1} + \mu_2 u_{i2}), \\ T_{i,4} &= 1 + \mu_{0i} \mu_2 u_{i2} (u_{i2} - u_{i1}) - d_i u_{i1}, \\ T_{i,5} &= 1 + \mu_{0i} \mu_1 u_{i1} (u_{i1} - u_{i2}) - d_i u_{i2}, \\ T_{i,6} &= 1 + \mu_{0i} \mu_1 u_{i1}^2, & T_{i,7} &= 1 + \mu_{0i} \mu_2 u_{i2}^2, \\ T_{i,8} &= 1 + \mu_{0i} (\mu_1 u_{i1}^2 + \mu_2 u_{i2}^2).\end{aligned}$$

3. Results of numerical studies

Numerical analysis is performed to determine the first eigenmode in two separate cases. First, a numerical analysis is carried out by varying the mass ratios μ_1 and μ_2 , ($\mu = \mu_1 = \mu_2$) which represent the ratios of the masses of the dynamic vibration absorbers to the mass of the beam. Second, based on the obtained relationships, the amplitude–frequency characteristics (AFC) of the system are constructed, and approximate optimal locations for installing the dynamic vibration absorbers are determined.

In the study of the motion of a rod equipped with dynamic vibration dampers, the choice of the damper mass plays a crucial role. In this work, the ratios of the dynamic damper masses to the mass of the rod are considered. For each case, the corresponding amplitude–frequency characteristic is presented. In the first case, a mass ratio of 0.05 is selected (red curve); in the second case, a ratio of 0.04 is chosen (blue curve); and in the third case, a ratio of 0.03 is considered (yellow curve).

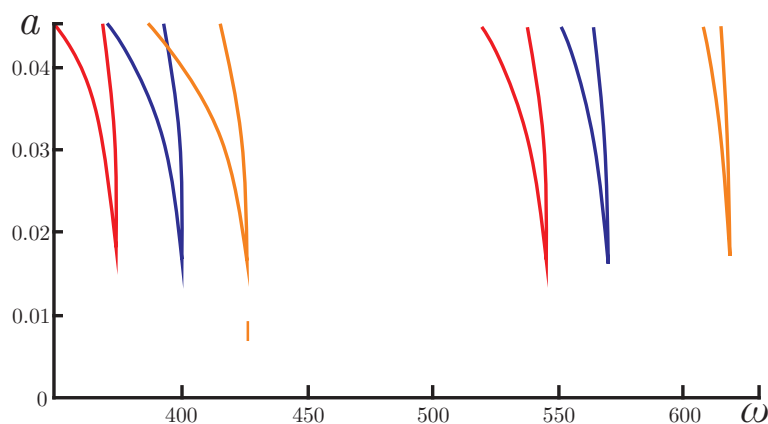


Рис. 3. Амплитудно–частотные характеристики стержня с динамическим гасителем колебаний (ДГК) при различных значениях массового отношения $\mu = m/m_s = 0,05; 0,04; 0,03$, соответствующие первой собственной форме колебаний $u_i(x) = \sin\left(\frac{i\pi x}{l}\right)$ ($i = 1$), при $p_1 = 470,517 \text{ c}^{-1}$ и различных координатах установки гасителя.

Fig. 3. Amplitude–frequency characteristics of a rod with a dynamic vibration damper (DVD) for different values of the mass ratio $\mu = m/m_s = 0.05, 0.04, 0.03$, corresponding to the first eigenmode $u_i(x) = \sin\left(\frac{i\pi x}{l}\right)$ ($i = 1$), with $p_1 = 470.517 \text{ s}^{-1}$ and different installation coordinates of the DVD.

The obtained graphs show that decreasing the damper mass, together with increasing the excitation frequency, leads to a noticeable shift of the stable and unstable regions of the system. At the same time, an increase in the mass of the dynamic vibration damper reduces the resonant frequency of the system and decreases the vibration amplitudes. As the damper mass grows, the resonance peak becomes lower; at a certain damper mass the vibration amplitude reaches a minimum, which is taken as the principal criterion for selecting the optimal damper mass. At this optimal mass, resonance is suppressed most effectively and the overall vibration level of the system is minimized.

When the installation points of the dynamic vibration dampers are shifted symmetrically along the length of the rod without changing their masses, the dominant stability region varies depending on the excitation frequency. In the first case, the dampers are installed at the points $l/3$ and $2l/3$ (red curve); in the second case, at the points $l/4$ and $3l/4$ (blue curve); in the third case, at the points $l/5$ and $4l/5$ (yellow curve); and in the fourth case, at the points $l/6$ and $5l/6$ (black curve).

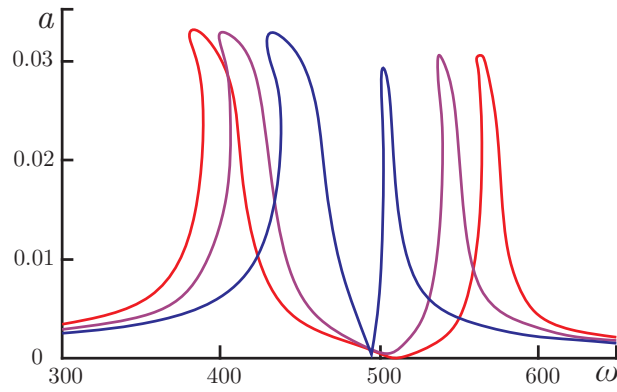


Рис. 4. Амплитудно–частотные характеристики (АЧХ) при массовом отношении $\mu = 0,04$ и различных координатах установки динамических гасителей колебаний: $l/3$ и $2l/3$ (красная кривая), $l/5$ и $4l/5$ (чёрная кривая), $l/12$ и $11l/12$ (синяя кривая).

Fig. 4. Amplitude–frequency characteristics (AFCs) for a mass ratio of $\mu = 0.04$ at different installation locations of the dynamic vibration dampers: $l/3$ and $2l/3$ (red curve), $l/5$ and $4l/5$ (black curve), and $l/12$ and $11l/12$ (blue curve).

An analysis of the obtained graphs shows that, as the installation points of the dynamic vibration dampers are moved symmetrically away from the center of the rod, the stability regions tend to approach each other.

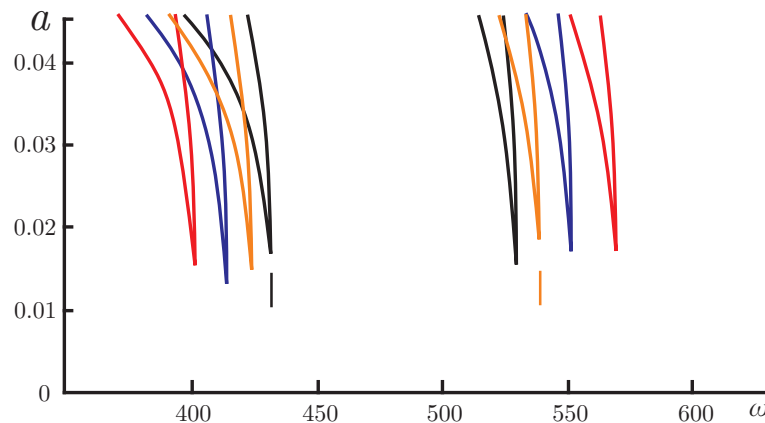


Рис. 5. Амплитудно–частотные характеристики системы при $\mu = 0,04$.

Fig. 5. Amplitude–frequency characteristics of the system for $\mu = 0.04$.

Figure 5 presents the amplitude–frequency characteristics of the system for a fixed mass ratio $\mu = 0.04$. The calculations are performed for different installation locations of the dynamic vibration dampers, which are arranged symmetrically with respect to the center of the rod. The damper positions correspond to the coordinate pairs $l/3$ and $2l/3$ (red curve), $l/4$ and $3l/4$ (blue curve), $l/5$ and $4l/5$ (yellow curve), and $l/6$ and $5l/6$ (black curve).

It can be observed that a symmetric displacement of the damper installation points away from the rod center significantly affects the amplitude–frequency response of the system and leads to noticeable changes in the location of the stability regions.

A horizontal displacement of the system leads to a significant shift in the resonant frequencies while preserving the overall vibration pattern. This makes it possible to control the resonance regions without altering the dynamic stability of the system. Consequently, varying the installation

positions of the dynamic vibration dampers along the beam provides an effective and convenient approach for optimizing resonant frequencies and controlling vibrations.

Conclusion

The problem of optimizing transverse vibrations of an elastic beam with two parallel-installed dynamic vibration dampers equipped with elastic elements under harmonic base excitation has been investigated. A systematic approach for determining the optimal installation parameters of dynamic vibration dampers for an elastic beam has been developed, taking into account the amplitude–frequency characteristics associated with transverse vibrations.

Numerical analyses of the system vibrations were carried. Numerical investigations demonstrate that the dynamic response of the beam can be effectively controlled by adjusting two key parameters: the mass ratios of the dynamic vibration dampers and their installation positions along the beam. Proper selection of these parameters leads to a significant reduction in vibration amplitudes and a controlled shift of resonant frequencies toward a desired operating range, thereby improving the overall dynamic stability of the system. As a result, the system attains dynamic stability, enhanced protection against resonance, and improved energy efficiency.

Список литературы

1. Ch.-M. Lee and V. N. Goverdovskiy, “Vibration Protection Systems with Negative and Quasi-Zero Stiffness,” Cambridge University Press, Cambridge, 2021, pp. 25–51.
<https://doi.org/10.1017/9781108874540.004>
2. E. E. Perepelkin, B. I. Sadovnikov, N. G. Inozemtseva, and M. V. Klimenko, “Investigation of the dynamics of transverse oscillations of a vertical rod under gravity, friction, and thermal expansion,” *Progress in Nuclear Energy*, 2024.
<https://doi.org/10.1016/j.pnucene.2024.105419>
3. D. Cubero and F. Renzoni, “Vibrational mechanics in higher dimension: Tuning potential landscapes,” *Physical Review E*, vol. 103, 032203, 2021.
<https://doi.org/10.1103/PhysRevE.103.032203>
4. E. E. Perepelkin, B. I. Sadovnikov, N. G. Inozemtseva, and M. V. Klimenko, “Investigation of the dynamics of transverse oscillations of a vertical rod under gravity, friction, and thermal expansion,” *Progress in Nuclear Energy*, 2024.
<https://doi.org/10.1016/j.pnucene.2024.105419>
5. Yu. Hua, W. Xie, and J. Xie, “Novel rod–sprung–mass model to investigate characteristics of building structural vibration induced by railways,” *Journal of Building Engineering*, 2024.
6. M. H. Zainulabidin and N. Jaini, “Vibration analysis of a rod structure attached with a dynamic vibration absorber,” *Applied Mechanics and Materials*, vol. 315, pp. 315–320, 2013.
<https://doi.org/10.4028/www.scientific.net/AMM.315.315>
7. V. Shpachuk, A. Rubanenko, Y. Vashchenko, and O. Beketov, “Influence of mechanical and structural parameters of the rod with mass damper on the natural frequencies of transverse vibrations,” no. 134, 2017, ISSN 0869-1231.
8. O. M. Dusmatov, *Modeling the dynamics of vibroprotection systems*, Fan Publishing House, Tashkent, 1997, p. 167.
9. G. S. Pisarenko and O. E. Boginich, *Oscillations of kinematically excited mechanical systems with allowance for energy dissipation*, Naukova Dumka, Kyiv, 1981, p. 219.
10. G. S. Pisarenko, A. P. Yakovlev, and V. V. Matveev, *Vibration-absorbing properties of*

- structural materials*, Naukova Dumka, Kyiv, 1971, p. 327.
11. M. Mirsaidov and K. Mamasoliev, "Contact interactions of multi-layer plates with a combined base," *AIP Conference Proceedings*, vol. 2637, 050001, 2022.
<https://doi.org/10.1063/12.0013538>
 12. M. U. Khodjabekov, Kh. M. Buranov, and A. E. Qudratov, " ," *AIP Conference Proceedings*, vol. 2637, 2021.
<https://doi.org/10.1063/5.0118292>
 13. M. Mirsaidov *et al.*, "Stability of nonlinear vibrations of vibroprotected plate," *Journal of Physics: Conference Series*, vol. 1921, 012097, 2021.
<https://doi.org/10.1088/1742-6596/1921/1/012097>
 14. M. Mirsaidov, O. Dusmatov, and M. Khodjabekov, "Stability of nonlinear vibrations of elastic plate and dynamic absorber in random excitations," *E3S Web of Conferences*, vol. 410, 03014, 2023.
<https://doi.org/10.1051/e3sconf/202341003014>
 15. O. Dusmatov, Kh. Buranov, and T. Absalomov, "On nonlinear vibrations of an elastic rod with a dynamic damper," *Proceedings of the International Conference on Modern Problems of Mathematics, Physics and Information Technology*, Tashkent, 2004, pp. 156–158.
 16. O. Dusmatov, Kh. Buranov, and A. Qudratov, "Stability of an elastic rod with dynamic absorbers under harmonic transverse vibrations," *AIP Conference Proceedings*, vol. 3177, 080002, 2025.
<https://doi.org/10.1063/5.0294900>
 17. Kh. Buranov, Q. Li, and V. L. Popov, "Area and boundary contributions to friction in an adhesive contact of power-law indenters," *AIP Conference Proceedings*, vol. 3177, 040002, 2025.
<https://doi.org/10.1063/5.0294715>
 18. M. U. Khodjabekov, Kh. M. Buranov, and A. E. Qudratov, "Modal mass and stiffness of hysteresis type elastic dissipative characteristic plate," *AIP Conference Proceedings*, vol. 2637, 050004, 2022.
<https://doi.org/10.1063/5.0118292>
 19. М. А. Павловский, Л. М. Рыжков, В. Б. Яковенко, О. М. Дусматов, "Нелинейные задачи динамики виброзащитных систем," *Техника, К.*, 1997, 204 с.

References

1. Ch.-M. Lee and V. N. Goverdovskiy, "Vibration Protection Systems with Negative and Quasi-Zero Stiffness," Cambridge University Press, Cambridge, 2021, pp. 25–51.
<https://doi.org/10.1017/9781108874540.004>
2. E. E. Perepelkin, B. I. Sadvnikov, N. G. Inozemtseva, and M. V. Klimenko, "Investigation of the dynamics of transverse oscillations of a vertical rod under gravity, friction, and thermal expansion," *Progress in Nuclear Energy*, 2024.
<https://doi.org/10.1016/j.pnucene.2024.105419>
3. D. Cubero and F. Renzoni, "Vibrational mechanics in higher dimension: Tuning potential landscapes," *Physical Review E*, vol. 103, 032203, 2021.
<https://doi.org/10.1103/PhysRevE.103.032203>
4. E. E. Perepelkin, B. I. Sadvnikov, N. G. Inozemtseva, and M. V. Klimenko, "Investigation of the dynamics of transverse oscillations of a vertical rod under gravity, friction, and thermal expansion," *Progress in Nuclear Energy*, 2024.
<https://doi.org/10.1016/j.pnucene.2024.105419>

5. Yu. Hua, W. Xie, and J. Xie, "Novel rod–sprung–mass model to investigate characteristics of building structural vibration induced by railways," *Journal of Building Engineering*, 2024.
6. M. H. Zainulabidin and N. Jaini, "Vibration analysis of a rod structure attached with a dynamic vibration absorber," *Applied Mechanics and Materials*, vol. 315, pp. 315–320, 2013.
<https://doi.org/10.4028/www.scientific.net/AMM.315.315>
7. V. Shpachuk, A. Rubanenko, Y. Vashchenko, and O. Beketov, "Influence of mechanical and structural parameters of the rod with mass damper on the natural frequencies of transverse vibrations," no. 134, 2017, ISSN 0869-1231.
8. O. M. Dusmatov, *Modeling the dynamics of vibroprotection systems*, Fan Publishing House, Tashkent, 1997, p. 167.
9. G. S. Pisarenko and O. E. Boginich, *Oscillations of kinematically excited mechanical systems with allowance for energy dissipation*, Naukova Dumka, Kyiv, 1981, p. 219.
10. G. S. Pisarenko, A. P. Yakovlev, and V. V. Matveev, *Vibration-absorbing properties of structural materials*, Naukova Dumka, Kyiv, 1971, p. 327.
11. M. Mirsaidov and K. Mamasoliev, "Contact interactions of multi-layer plates with a combined base," *AIP Conference Proceedings*, vol. 2637, 050001, 2022.
<https://doi.org/10.1063/12.0013538>
12. M. U. Khodjabekov, Kh. M. Buranov, and A. E. Qudratov, " ," *AIP Conference Proceedings*, vol. 2637, 2021.
<https://doi.org/10.1063/5.0118292>
13. M. Mirsaidov *et al.*, "Stability of nonlinear vibrations of vibroprotected plate," *Journal of Physics: Conference Series*, vol. 1921, 012097, 2021.
<https://doi.org/10.1088/1742-6596/1921/1/012097>
14. M. Mirsaidov, O. Dusmatov, and M. Khodjabekov, "Stability of nonlinear vibrations of elastic plate and dynamic absorber in random excitations," *E3S Web of Conferences*, vol. 410, 03014, 2023.
<https://doi.org/10.1051/e3sconf/202341003014>
15. O. Dusmatov, Kh. Buranov, and T. Absalomov, "On nonlinear vibrations of an elastic rod with a dynamic damper," *Proceedings of the International Conference on Modern Problems of Mathematics, Physics and Information Technology*, Tashkent, 2004, pp. 156–158.
16. O. Dusmatov, Kh. Buranov, and A. Qudratov, "Stability of an elastic rod with dynamic absorbers under harmonic transverse vibrations," *AIP Conference Proceedings*, vol. 3177, 080002, 2025.
<https://doi.org/10.1063/5.0294900>
17. Kh. Buranov, Q. Li, and V. L. Popov, "Area and boundary contributions to friction in an adhesive contact of power-law indenters," *AIP Conference Proceedings*, vol. 3177, 040002, 2025.
<https://doi.org/10.1063/5.0294715>
18. M. U. Khodjabekov, Kh. M. Buranov, and A. E. Qudratov, "Modal mass and stiffness of hysteresis type elastic dissipative characteristic plate," *AIP Conference Proceedings*, vol. 2637, 050004, 2022.
<https://doi.org/10.1063/5.0118292>
19. М. А. Павловский, Л. М. Рыжков, В. Б. Яковенко, О. М. Дусматов, "Нелинейные задачи динамики виброзащитных систем," *Техника*, К., 1997, 204 с.



Кудратов Анвар Эргашевич — родился 13 сентября 1985 года в Каттакурганском районе Самаркандской области Республики Узбекистан. В 2010 году окончил Самаркандский государственный университет по направлению «Механика» (бакалавриат), в 2014 году — магистратуру Самаркандского государственного университета по специальности «Теория вероятностей и математическая статистика». Трудовую деятельность начал в 2010 году. В разные годы работал учителем математики, ассистентом кафедры «Теоретическая и прикладная механика» Самаркандского государственного университета. В 2021–2023 гг. — базовый докторант Самаркандского государственного архитектурно-строительного университета по специальности «Механика деформируемого твердого тела». С 2024 года работает преподавателем кафедры математики Самаркандского государственного педагогического института.

Самарканд, Узбекистан, улица Спитаменшох, 166
Самаркандский государственный педагогический институт, Узбекистан
E-mail: a_qudratov1985@mail.ru
ORCID: 0009-0000-3121-8676



Худазаров Равшан Сапарович — родился в Хазараспском районе Хорезмской области Республики Узбекистан. В 1994 году окончил (дневное отделение) Ташкентский областной государственный педагогический институт. По специальности 01.02.04 — «Механика деформируемого твердого тела» в 2010 году успешно защитил диссертацию на соискание ученой степени кандидата физико-математических наук.

Ташкентская область, Кибрайский район, улица Карамурат 1, 100000 Ташкент, Uzbekistan.
Совместный Белорусско-Узбекский межотраслевой институт прикладных технических квалификаций в городе Ташкенте, Uzbekistan
E-mail: nurali_e@mail.ru
ORCID: 0009-0000-5717-0666



Юлдошева Озода Олимжоновна — окончила бакалавриат (2007–2011 гг.) и магистратуру (2011–2013 гг.) по направлению «Математика» Национального университета Узбекистана имени Мирзо Улугбека.

В 2017–2025 годах работала ассистентом кафедры «Высшая математика» Бухарского государственного технического университета. С 2025 года по настоящее время работает ассистентом кафедры «Высшая математика» Ташкентского химико-технологического института.

Автор более 10 научных статей, опубликованных в республиканских и международных научных журналах.

Республика Узбекистан, 100011, г. Ташкент, ул. Навои, 32
Ташкентский химико-технологический институт
E-mail: parizodaxondamir@gmail.com
ORCID: 0009-0008-5820-0618